




3DFR0.3A thru 3DFR0.3M

Surface mount fast recovery rectifiers

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junctions
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering:
260°C/10 seconds at terminals
- Component in accordance to
RoHS 2011/65/EU and WEEE 2002/96/EC

丝印: F7



SOD-323



RoHS
COMPLIANT

Mechanical Data

- **Case:** SOD-323
Molding compound meets
UL 94 V-0 flammability rating
- **Terminals:** Solder plated, solderable per
MIL-STD-750, Method 2026
- **Polarity:** Laser band denotes cathode end

Major Ratings and Characteristics

$I_{F(AV)}$	0.3A
V_{RRM}	50V to 1000V
I_{FSM}	10A
I_R	5 μ A
V_F	1.3V
$T_{Jmax.}$	150°C

Maximum Ratings & Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Item	Symbol	3DFR 0.3A	3DFR 0.3B	3DFR 0.3D	3DFR 0.3G	3DFR 0.3J	3DFR 0.3K	3DFR 0.3M	Unit
Marking code		3FA	3FB	3FD	3FG	3FJ	3FK	3FM	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_L=135^\circ\text{C}$	$I_{F(AV)}$	0.3							A
Peak forward surge current 8.3 ms single half sine- wave superimposed on rated load	I_{FSM}	10							A
Operating and storage temperature range	T_J, T_{STG}	-55 to +150							°C
Thermal resistance from junction to lead ⁽¹⁾	$R_{\theta JL}$	35							°C/W

Note1: Mounted on PCB with 0.2x0.2" (5.0mmx5.0mm) copper pad areas.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Item	Test conditions		Symbol	3DFR0.3A~ 3DFR0.3G	3DFR0.3J	3DFR0.3K~ 3DFR0.3M	Unit
Instantaneous forward voltage	I _F =0.3A		V _F	1.30			V
Maximum reverse current	V _R =V _{DC}	T _J =25°C	I _R	5.0			μA
		T _J =125°C		50			
Reverse recovery time	I _F =0.5A I _R =1.0A, I _{rr} =0.25A		t _{rr}	150	250	500	nS



3DFR0.3A thru 3DFR0.3M

Surface mount fast recovery rectifiers

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

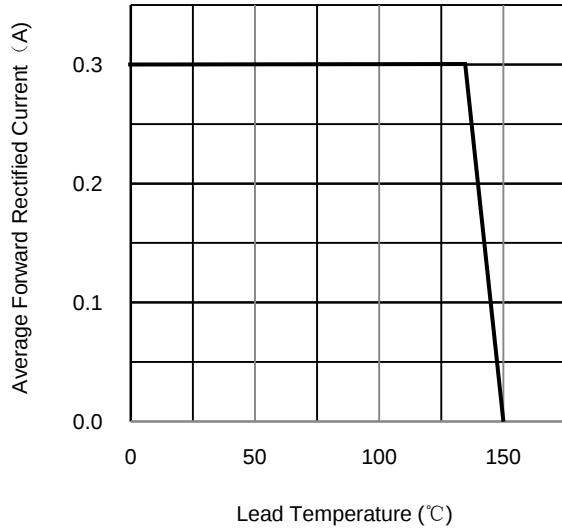


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

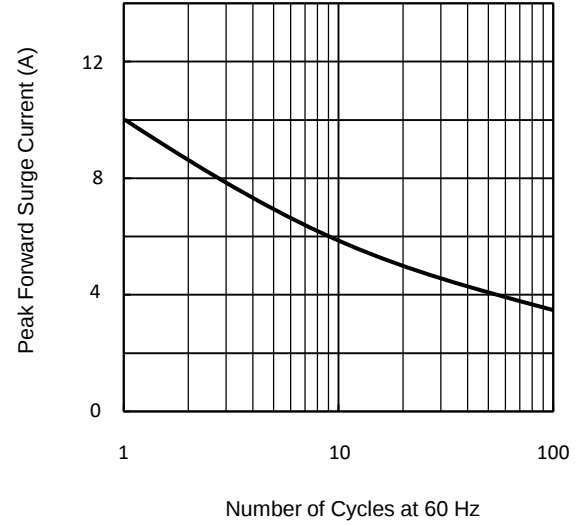


Fig.3 Typical Instantaneous Forward Characteristics


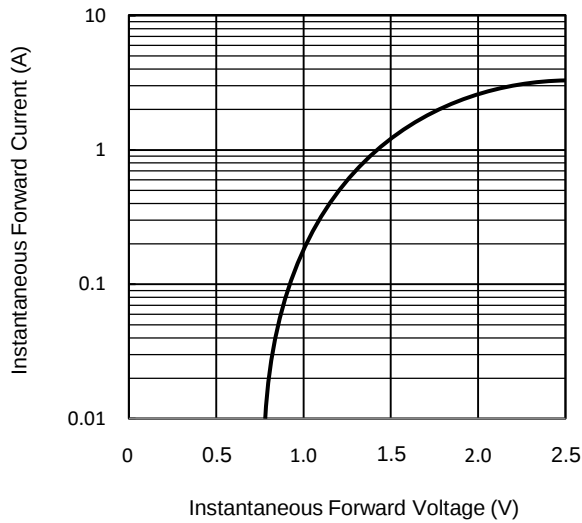


Fig.4 Typical Reverse Characteristics



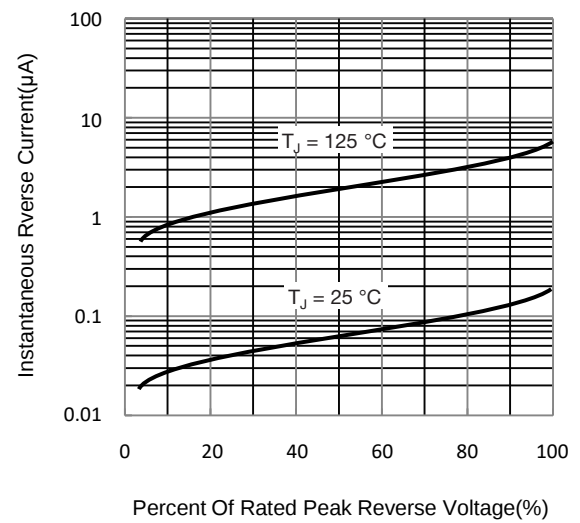


3DFR0.3A thru 3DFR0.3M


Surface mount fast recovery rectifiers

Package Outline

SOD-323

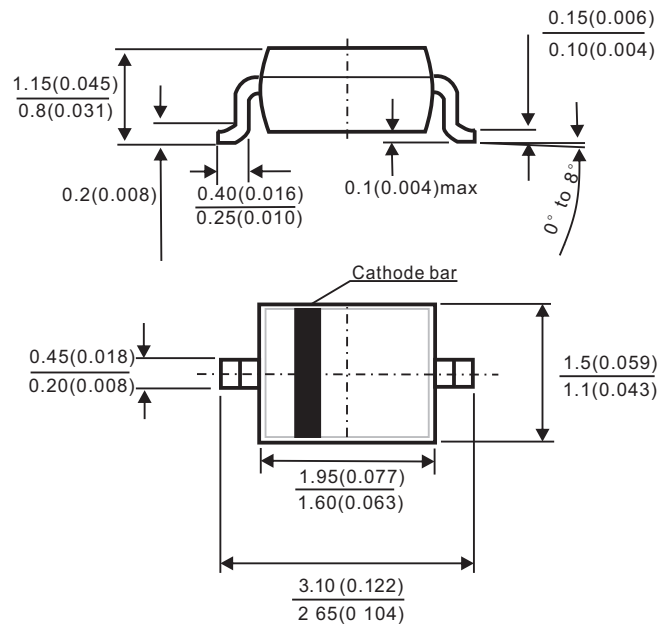

Footprint recommendation:

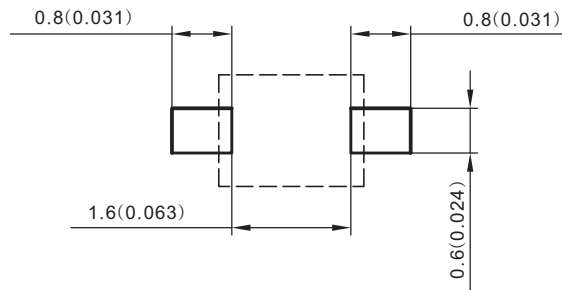

Package dimensions in millimeters (inches)

Ordering Information

Outline	Reel (PCS)	Per Carton (PCS)	Reel Diameters (mm)
Taping	3,000	240,000	178/7"

- TRR is registered trademark of Zhejiang TRR Microelectronics Inc. Zhejiang TRR Microelectronics Inc reserves the right to make changes to any product in this specification without notice.
- Zhejiang TRR Microelectronics Inc does not assure any liability arising out of the applications or use of any product described in this specification.
- Zhejiang TRR Microelectronics Inc advises customers to obtain the latest version of the device information before placing orders to verify that the required information is current.